




Escanee para ver
las instrucciones
en español

Door Sensor

SMARTDOOR

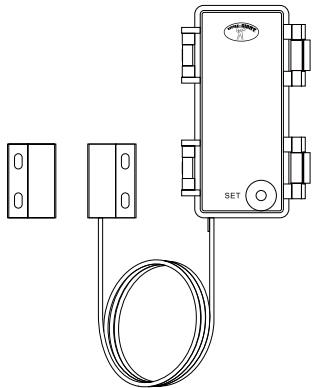

A Welcome!

Thank you for purchasing Little Giant® products! We appreciate you trusting Little Giant® for your smart farm and ranch automation needs. Your 100% satisfaction is our goal. If you experience any problems with your installation, with our products or if you have any questions that this manual does not answer, please contact us right away. See the Contact Us section for more info.

Thank you!

Miller Manufacturing

The following icons are used in this guide to convey specific types of information:



Very important information
(can save you time!)

B Before You Begin

Please note: this is a quick start guide, intended to get you started on the installation of your Door Sensor. Download the full Installation & User Guide by scanning this QR code:



Installation &
User Guide

You can also find all guides and additional resources, such as videos and troubleshooting instructions, on the product page by scanning the QR code below or by visiting:

<https://miller-mfg.com/products/door-sensor>




Product Support



Hub Required

Your Door Sensor connects to the internet via a Little Giant® Smart Hub (SMARTHUB) and it does not connect directly to your WiFi or local network. In order for remote access to the device from the app, and for full functionality, a Hub is required. This guide assumes the BARN-IQ™ app has been installed on your smartphone, and a Little Giant® Smart Hub is installed and online (or your location, home, farm, etc., is already served by a Little Giant® wireless network).

C In the Box




Door Sensor



Magnet



Self-tapping
Screw (M3) (4)



Quick Start Guide




2 x AA Batteries



Double-sided
Tape

D Required Items

Items You May Need:




Medium Phillips
Screwdriver



Drill & Drill Bits




Velcro Strips



Screws & Anchors

E Get to Know Your Door Sensor

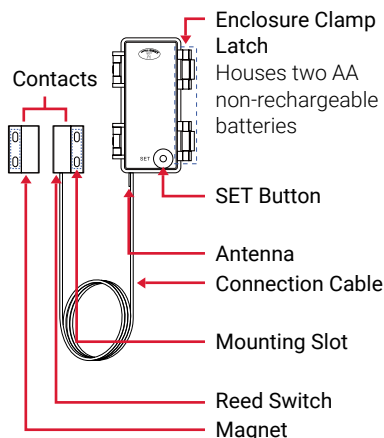

E Get to Know Your Door Sensor, Cont.

LED Behaviors



Blinking Red Once
Alert Mode (Contacts are
Opened or Closed)



Blinking Green
Connecting to Cloud



Fast Blinking Green
Control-D2D Pairing in
Progress



Slow Blinking Green
Updating



Fast Blinking Red
Control-D2D Unpairing in
Progress



**Blinking Red And Green
Alternately**
Restoring to Factory Default

F Install the App

If you are new to Little Giant® Smart Products, please install the BARN-IQ™ app on your phone or tablet, if you have not already. Otherwise, please proceed to the next section.

Scan the QR code below to visit the Smart Products resource page or find the BARN-IQ™ app on the appropriate app store.



Apple phone/tablet
iOS 9.0 or higher



Android phone/
tablet 4.4 or higher

Open the app and tap **Sign up** for an account. You will be required to provide a username and a password. Follow the instructions, to set up a new account. Allow notifications, when prompted.

F Install the App, Continued

You will immediately receive a welcome email from no-reply@miller-mfg.com with some helpful information. Please mark the miller-mfg.com domain as safe, to ensure you receive important messages in the future.

Log in to the app using your new username and password.

The app opens to the **Favorite** screen. This is where your favorite devices and scenes will be shown. You can organize your devices by location, in the **Location** screen, later.

Refer to the full user guide and online support for instructions on the use of the BARN-IQ™ app.

G Add Your Door Sensor to the App

1. Tap **Add Device** (if shown) or tap the scanner icon:

Scanner Icon



2. Approve access to your phone's camera, if requested. A viewfinder will be shown on the app.

3. Hold the phone over the QR code on the Door Sensor so that the code appears in the viewfinder. If successful, the **Add Device** screen will be displayed.

4. Follow the instructions to add your Door Sensor to the app.

H Power Up

1. Observing the polarity indicators on the Door Sensor, install the provided AA batteries into the Door Sensor.

2. Observe the LED flashes red then green.

3. Close the cover and snap the two clasps in place.

Door sensor basics

Before installing your new Door Sensor, it is best if you understand how it works. The Door Sensor is made up of three main parts. The main part is the large enclosure which houses the batteries and electronics. This is typically referred to as the contact sensor, or just "sensor". A small black part is attached to the sensor by a black wire. This is a reed switch. A reed switch can be thought of like a simple switch, sort of like a doorbell, but instead of pressing it, you'd hold a magnet to it. A reed switch is sensitive to the force of a magnet, and when one is close enough, the reed switch completes its circuit, informing the sensor that the door, gate, or lid is in the closed position. The other black piece that resembles the reed switch is the magnet, of course.

The reed switch has a maximum distance between it and the magnet, while it will indicate the door is closed. This is often referred to as the "gap". The Door Sensor has a maximum gap of around ¾" or 19 millimeters. The door material, such as steel versus wood, can adversely impact this distance.

The reed switch on the Door Sensor can be removed, allowing for wiring to be connected to any set of dry (no voltage) normally-open or -closed contacts. This includes things like high-security, armored door contacts and contacts made for chain link fence gates. Refer to the full user guide for instructions on this application.

In this guide we'll refer to the door, gate or lid, or other object you are installing the Door Sensor on, simply as a gate.

When installed on your gate the two parts should remain less than ¾" away from each other with the gate in the closed position. When determining the appropriate location, placement and orientation of the Door Sensor parts, you can view the status of the Door Sensor in the BARN-IQ™ app, as well as use the sensor's LED indicator (which illuminates briefly when the door is opened or closed) to check your installation.

Sensor location considerations

The Door Sensor can be used on many types of gates, doors, windows, lids, and drawers, etc. It is not within the scope of this guide to cover all applications, but additional information can be found in the full user guide. If you need guidance with your application, please contact us!

Please have your Door Sensor added to the app and online before starting the installation process. This will allow you to check the status of the door sensor in the BARN-IQ™ app, so you can verify and test your installation.

Before installing the Door Sensor, consider the following:

- The magnet can be on the door, or the reed switch can be on the door. Of course, the sensor body itself must be mounted with the reed switch.
- The Door Sensor should always be installed on the indoor and/or "secure" side of the door (that is on the locked or private side of the door, which should not be subjected to tampering or disabling by an intruder, etc.).
- Avoid locations where the sensor will be subjected to physical damage, such as on the bottom of the door (where it might be kicked) or near the handle (where is might be struck by a hand or object).
- Do not place the reed switch too close to the magnet. As the gate may shift over time, or as the gate material can shrink or expand with temperature changes, the distance between the two pieces might change later, too, resulting in the two parts colliding.
- Use care to not place your reed switch and magnet too far apart. If you have placed the reed switch and magnet at their absolute farthest distance from each other, expansion or contraction of the gate or frame may occur, due to temperature or humidity

changes. This could result in your Door Sensor indicating the gate is open when it is not. Also, gates with too much play (movement while in the closed position), can contribute to false-open indications.

Preinstall the Sensor

After determining the location for your Door Sensor, we recommend that you preinstall the sensor to test the proposed location for each part. The Door Sensor itself can be mounted to the surface using the included double-sided tape. The reed switch and magnet are designed to be screwed to the gate/frame surface. If the included screws are not appropriate for the gate/surface material, substitute them for the appropriate hardware. Or, you may consider trimming off a small piece of double-sided tape for the reed switch and magnet (or furnish your own).

1. Before using double-sided tape for any item, it is very important that you first clean the mounting surface! If the mounting surface is dirty, grimy, greasy or it is not clean and dry, the effectiveness of the tape's adhesive will be reduced. The Door Sensor might fall down later, resulting in damage (that is not covered by the warranty). The best way to clean most surfaces is with Rubbing Alcohol. Allow the alcohol to fully evaporate before installing your Door Sensor. If using chemicals like soap or a degreaser, use a cloth or paper towel damp with water, to fully remove any cleaning substances from the surface.
2. To preinstall the reed switch, use painter's tape, for example, to hold it in place at the desired location.
3. Allow for the length of wire that will be needed if the reed switch and Contact Switch are installed where desired.

4. With the gate in the normal/closed position, to preinstall the magnet, use painter's tape, for example, to hold it in place at the desired location. While placing the magnet, observe the LED on the front of the Door Sensor. It will briefly flash red when the magnet is sufficiently close to the reed switch. It will also briefly flash red when the two are separated.

5. Ensure the Door Sensor indicates the gate is closed when it is closed, and that it indicates the gate is open when opened.

Install the Door Sensor

After you are satisfied with the location and placement of the Door Sensor, you can now permanently install it:

1. If you used painter's tape to hold the parts in place, you may find it easiest to partially remove the tape, just enough to allow for screwing the reed switch and magnet in place. Otherwise, you may wish to remove the tape entirely, while marking the exact location of the sensor and magnet with a pencil or marker or painter's tape. Using the supplied screws, screw the reed switch and magnet components to the gate/frame surface, while either observing the Door Sensor status in the app, or by carefully observing the LED.
2. Test the gate opening and closing.
3. If you are satisfied with the Door Sensor indications, permanently install the Door Sensor. Remove one side of the mounting tape's protective plastic. Place the mounting tape, sticky side down, on the back of the Door Sensor. Remove the remaining piece of protective plastic. Place the Door Sensor on the mounting surface. Press down and hold for at least 5 seconds, for the adhesive to bond to the surface. Refer to the full user guide and/or online documentation to complete the setup of your Door Sensor.

We are here for you, if you ever need any assistance installing, setting up or using a BARN-IQ™ app or Little Giant® Sensors!

Need help? For fastest service, please email us 24/7 at customerservice@miller-mfg.com

Or call us at **800-260-0888, Monday - Friday 7:00 AM to 5:00 PM CT.**

You can also find additional support and ways to contact us at: www.miller-mfg.com

Or scan the QR code:



Support Home Page

Finally, if you have any feedback or suggestions for us, please email us at customerservice@miller-mfg.com

Thank you for trusting Little Giant®



© 2026 Miller Manufacturing

Miller Manufacturing
Glencoe, MN 55336 USA
www.miller-mfg.com